
STYLE **INTEMPOREL** BAMWOOD®

PanooTouch by ootouch

PANELS 16MM - 3 PLY

Dimensions:	**16 x 1220 x 2440 mm**
Weight:	**±46 kg**
Colour Caramel	PB16C1220
Colour Camel	PB16CA1220
Colour Champagne	PB16CH1220
Colour Gold	PB16G1220

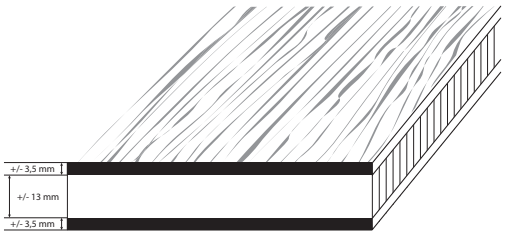

CARAMEL

CAMEL

CHAMPAGNE

GOLD

PANELS 20MM - 3 PLY

Dimensions:	**20 x 1220 x 2440 mm**
Weight:	**±50 kg**
Colour Caramel	PB20C1220
Colour Camel	PB20CA1220
Colour Champagne	PB20CH1220
Colour Gold	PB20G1220



CARAMEL


CAMEL

CHAMPAGNE

GOLD

PANELS 30MM - 5 PLY


Dimensions:	**30 x 1220 x 2440 mm**
Weight:	**±75 kg**
Colour Caramel	PB30C1220

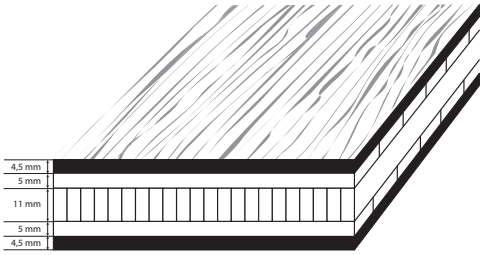

CARAMEL

PANELS 40MM - 5 PLY

Dimensions:	**40 x 650 x 3050 mm**
	40 x 1220 x 2440 mm
Weight:	**±65 kg /± 97 kg**
Colour Caramel	PB40C650
	PB40C1220
Colour Camel	PB40CA1220
Colour Champagne	PB40CH650
	PB40CH1220
Colour Gold	PB40G650
	PB40G1220

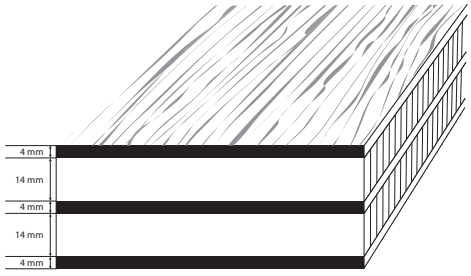

CARAMEL

CAMEL

CHAMPAGNE

GOLD

WARRANTY: up to 20 years subject to conditions - See our website ootouch.eu

nv ootouch sa
Av du Commerce 33 - 1420 Braine-l'Alleud • Belgium | Tel. : +32 (0)2 384 58 77 | **info@ootouch.be** | **ootouch.eu**

PanooTouch®
by ootouch

FINISH: All our panels are delivered raw; we recommend a finish with a Woca® oil or Bona® varnish
As the products are natural, the colouring must be adapted with the appropriate primer.
MAINTENANCE: To be adapted to the applied treatment.
STORAGE: Panels must always be stored flat.
PACKAGING: Individually in cartons.

TECHNICAL CHARACTERISTICS

BRINELL HARDNESS	±86 N/mm² - EN 1534 standard (CTIB Report 5229/2)
CONTRACTION COEFFICIENT	±0.14% per % of moisture variation
MOISTURE CONTENT	±10% at 20°C and 65% relative humidity ±8% at 20°C and 50% relative humidity
DENSITY	±1050 kg/m³ for BamWood® ±740 kg/m³ for interior
FORMALDEHYDE EMISSION ≤ 0.013 mg/m²h - EN 717-1 & EN 16000 standard (CTIB DE670X417)	
THERMAL CONDUCTIVITY	±0.24 W/mK - EN 12664 standard (CTIB Report 5229/2)

ootouch®
DES SOLUTIONS DÉCO-RESPONSABLES

WARRANTY: up to 20 years subject to conditions - See our website ootouch.eu

nv ootouch sa
Av du Commerce 33 - 1420 Braine-l'Alleud • Belgium | Tel. : +32 (0)2 384 58 77 | **info@ootouch.be** | **ootouch.eu**