
PanooTouch® by ootouch

STYLE CLASSIC **HORIZONTAL**

PANELS 20MM - 3 PLY

Dimensions:	**20 x 1220 x 2440 mm**
Weight:	**±42 kg**
Colour Caramel	P20HC1220
Colour Natural	P20HN1220

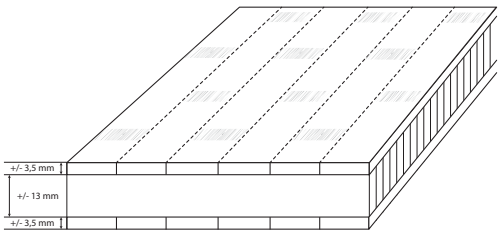


CARAMEL

NATUREL

PANELS 40MM - 5 PLY

Dimensions:	**40 x 1220 x 2440 mm**
Weight:	**±86 kg**
Colour Caramel	P40HC1220
Colour Natural	P40HN1220

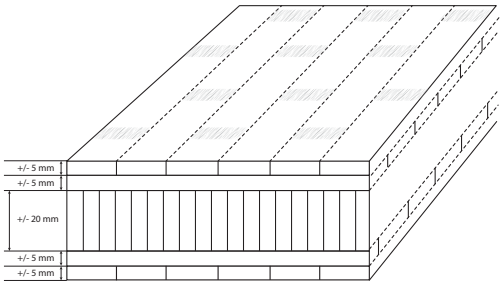

CARAMEL

NATUREL

FINISH: All our panels are delivered raw; we recommend a finish with a Woca® oil or Bona® varnish
As the products are natural, the colouring must be adapted with the appropriate primer.
MAINTENANCE: To be adapted to the applied treatment.
STORAGE: Panels must always be stored flat.
PACKAGING: Individually in cartons.

TECHNICAL CHARACTERISTICS

BRINELL HARDNESS	±43 N/mm² - EN 1534 standard (CTIB Report 5229/2)
CONTRACTION COEFFICIENT	±0.14% per % of moisture variation
MOISTURE CONTENT	±10% at 20°C and 65% relative humidity ±8% at 20°C and 50% relative humidity
DENSITY	±740 kg/m³
FORMALDEHYDE EMISSION ≤ 0.013 mg/m²h - EN 717-1 & EN 16000 standard (CTIB DE670X417)	
THERMAL CONDUCTIVITY	±0.24 W/mK - EN 12664 standard (CTIB Report 5229/2)

ootouch® DES SOLUTIONS DÉCO-RESPONSABLES

WARRANTY: up to 20 years subject to conditions - See our website ootouch.eu

nv ootouch sa
Av du Commerce 33 - 1420 Braine-l'Alleud • Belgium I Tel. : +32 (0)2 384 58 77 I **info@ootouch.be** I **ootouch.eu**