REF: D20C2OB140 / D20C2OG140 / D20C3SA140
D20COC140 / D20CSW140


DeckooTouch® by ootouch

THE ECOLOGICAL ALTERNATIVE TO WOODEN DECKING

COMPOSITE RECYCLÉ / **Massif** [5 coloris]

DeckooTouch® composite decking is made of 60% wood flour, 30% recycled high-density polyethylene (HDPE) and 10% additives (anti-UV agents, anti-oxidants, binders and hardener, stabiliser, colourant). The components are blended under high pressure, producing very dense, rot-proof and durable boards. The quality of our products allows us to offer a warranty of up to 15 years, provided that installation is carried out according to our instructions, in compliance with the country's rules, using our accessories (clips, screws...), and by following our maintenance recommendations.

OLD BROWN



OLD GREY



SAND



OLD CHOCOLATE



STONEWOOD



REFERENCE	COLOUR	DIMENSIONS	FACES	PALLET CONTENT	INSTALLATION
D20C2OB140	OLD BROWN	20x140x2200	2 (grooved/aged wood)	144 lames 44,35m²	Clips
D20C2OG140	OLD GREY	20x140x2200	2 (smooth/aged wood)	144 lames 44,35m²	Clips
D20C3SA140	SAND	20x140x2200	2 (smooth/wood)	144 lames 44,35m²	Clips
D20COC140	OLD CHOCOLATE	20x140x2200	2 (smooth/aged wood)	144 lames 44,35m²	Clips
D20CSW140	STONEWOOD	20x140x2200	2 (brushed wood/aged wood)	144 lames 44,35m²	Clips



STORAGE, INSTALLATION AND MAINTENANCE
(according to DTU 51.4 or local standard)

- The boards must be stored horizontally
- A correctly sized substructure (pedestals, joists...) must be installed according to the standards in force.
- Natural ventilation of the structure must be provided (> 1% of the surface).
- As the main component is natural, slight shade variations between batches are possible. Be sure to mix the boards well before installation.
- Our boards, joists and accessories (pedestals, clips, screws) are warranted. We do not warrant the use of other accessories (clips...) or other fixing materials (joists, battens, screws...).
- We recommend using our joists. (see data sheets)
- Maintenance should be carried out at least once a year.
- Time and the effect of the sun may cause slight shade variations. This phenomenon is natural and cannot be the subject of a warranty claim.
- Installation and maintenance instructions are available on our website ootouch.eu
- Installation: www.ootouch.eu/fr/conseils
- Maintenance: www.ootouch.eu/fr/conseils


CHARACTERISTICS TECHNICAL

- Brinell hardness: ±79 N/mm² (Intertek 170601007SHF-BP-2)
- Density: ±1340 kg/m³
- Moisture content: 2.6% (28-day immersion at 20°C)
- Fire rating: DFL-S1 EN13893 – TFI 421335-05 – EN13501-1:2010
- Static bending strength: 23.4 N/mm²
- Dimensional stability:

max width: 0.3% (28-day immersion at 20°C)
max length: 0.2% (28-day immersion at 20°C)
max thickness: 2% (28-day immersion at 20°C)

- Slip resistance:
- Class DS. Friction coefficient μ: 0.31 lengthwise and 0.40 widthwise (EN13893:2002, TFI 421335-07)
- Pendulum test: PTV «dry»: 74, PTV «wet»: 41 (BS-7976-2:2002)
- Warranty: 15 years subject to conditions (see our website www.ootouch.eu)

ACCESSOIRES DE POSE

Starter clip	Fixing clip	Locking clip	End clip	Self-tappina stainless torx screw self-drilling	Stainless torx screw (pre-drilling)
					
DCLIPST	DCLIPC	DCLIPBLOC	DCLIPEND	DVPF4.35	DVPF4.25
20 clips/box Stainless 304	100 clips/box Stainless 304	50 clips/box Stainless 304	20 clips/box Stainless 304	4x35mm 200 screws/box Stainless 410	4x25mm 100 screws/box Stainless 410

ACCESSOIRES DE FINITION



Sand | Old Grey | Stonewood | Old Brown | Old Chocolate

The finishing accessories add the final touch to your deck, ensuring a neat, harmonious result and a perfect finish for an attractive and durable outcome.

REFERENCE	COLOUR	DIMENSIONS	FACES	PALLET CONTENT
D10C3SA120	SAND	10x120x2200	2 (smooth/wood)	72 lames
D10C2OG120	OLD GREY	10x120x2200	2 (smooth/aged wood)	72 lames
D10CSW120	STONEWOOD	10x120x2200	2 (brushed wood/aged wood)	72 lames
D10C2OB120	OLD BROWN	10x120x2200	2 (grooved/aged wood)	72 lames
D10COC140	OLD CHOCOLATE	10x120x2200	2 (smooth/aged wood)	72 lames


THE JOISTS

The quality and durability of a deck depend directly on the choice of joists:

Our solid natural joists offer excellent strength, great stability without deformation and easier installation. Attractive and versatile, they can also be used for cladding, pergolas, screens, etc.

Composite joists offer excellent stability and can be used in extreme conditions, including direct ground installation or as cladding support. They are a durable and versatile solution at a competitive price.

CHARACTERISTICS	DECKOOTOUCH NATUREL	DECKOOTOUCH COMPOSITE
DIMENSIONS	40 x 40 x 2200 mm	30 x 40 x 2200 mm
MATERIAL	Densified bamboo	Recycled composite
USE	Decking, exposed structures	Decking, cladding, wet areas
STRENGTH	Very high	High and constant
STABILITY	Very low deformation	No warping
HUMIDITY	Class 4	Fully rot-proof
DIRECT GROUND INSTALLATION	Ventilated support required	yes
TYPICAL SPACING	40-50 cm	33 cm
MAINTENANCE	No treatment required	No maintenance
KEY ASSET	Performance + Aesthetics	Durability + Price

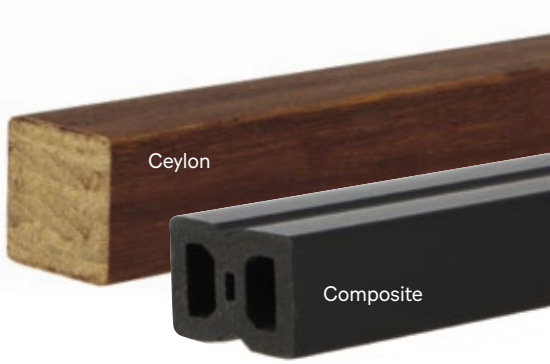

THE ADJUSTABLE PEDESTALS

Plot R1	Plot R2	Plot R3	Plot R4	Extensions	
				30mm	30 - 140mm
					
Réf:DPLR1.3055	DPLR2.5590	DPLR3.90160	DPLR4.160230	DPL.RAL30	DPL.RAL30.140
30-55mm 145gr 60p/sac (8,7kg)	50-90mm 200gr 45p/sac (9kg)	90-160mm 310gr 30p/sac (9,3kg)	165-230mm 390gr 25p/sac (9,7kg)		

Materials: recycled polypropylene – Load capacity: 1.6 to 4.5 Tonnes/m² (depending on the number of pedestals per m²) – Withstands temperatures from -25 to +70°C

WARRANTY: up to 15 years subject to conditions - See our website ootouch.eu

nv ootouch sa
Av du Commerce 33 - 1420 Braine-l'Alleud • Belgium | Tel. : +32 (0)2 384 58 77 | **info@ootouch.be** | **ootouch.eu**