PanooTouch
by ootouch

STYLE CLASSIC **VERTICAL**


PANELS 2.5MM - 5 PLY

Dimensions:	**2,5 x 1220 x 2440 mm**
Weight:	**±6 kg**
Colour Caramel	P2.5VC1220

CARAMEL

PANELS 7MM - 3 PLY


Dimensions:	**7 x 1220 x 2440 mm**
Weight:	**±15 kg**
Colour Caramel	P7VC1220

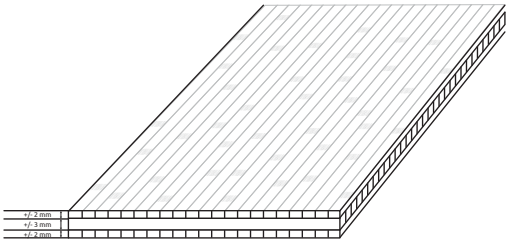

CARAMEL

PANELS 12MM - 3 PLY


Dimensions:	**12 x 1220 x 2440 mm**
Weight:	**±26 kg**
Colour Caramel	P12VC1220

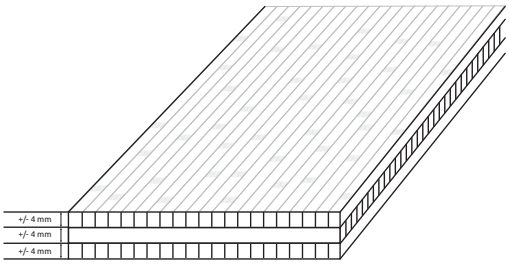

CARAMEL

PANELS 16MM - 3 PLY


Dimensions:	**16 x 1220 x 2440 mm**
Weight:	**±35 kg**
Colour Caramel	P16VC1220

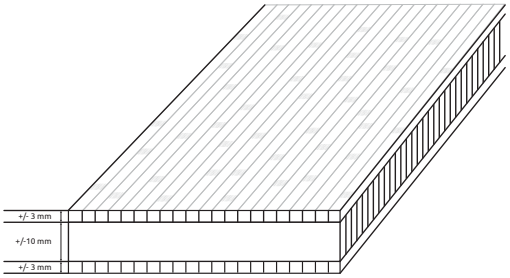

CARAMEL

PANELS 20MM - 3 PLY

Dimensions:	**20 x 650 x 3050 mm** **20 x 1220 x 2440 mm**
Weight:	**±35 kg > width 650** **±43 kg > width 1220**
Colour Caramel	P20VC650.3050 P20VC1220
Colour Natural	P20VN1220

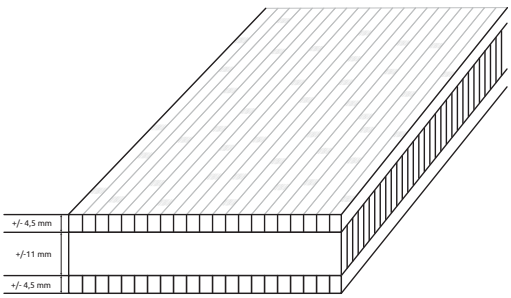

CARAMEL


NATUREL

WARRANTY: up to 20 years subject to conditions - See our website ootouch.eu

nv ootouch sa
Av du Commerce 33 - 1420 Braine-l'Alleud • Belgium | Tel. : +32 (0)2 384 58 77 | **info@ootouch.be** | **ootouch.eu**

PANELS 30MM - 5 PLY


Dimensions:	**30 x 650 x 3050 mm** **30 x 1220 x 2440 mm**
Weight: ± 34 kg -> width 650x2440 ± 43 kg -> width 650x3050 ± 64 kg -> width 1220	
Colour Caramel	P30VC650 P30VC650.3050 P30VC1220

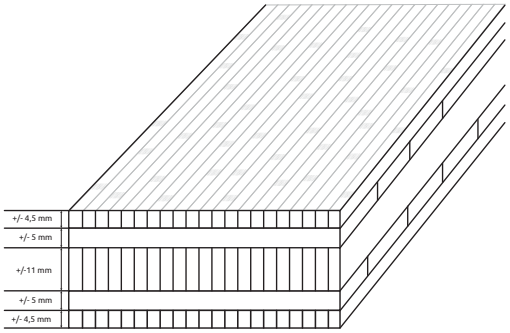

CARAMEL

PANELS 40MM - 5 PLY

Dimensions:	**40 x 650 x 3050 mm** **40 x 1220 x 2440 mm**
Weight:	**± 57 kg -> width 650** **± 86 kg -> width 1220**
Colour Caramel	P40VC650 P40VC1220
Colour Natural	P40VN1220

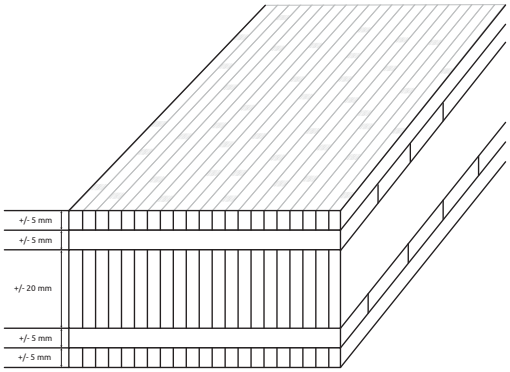

CARAMEL

NATUREL

FINISH: All our panels are delivered raw; we recommend a finish with a Woca® oil or Bona® varnish
As the products are natural, the colouring must be adapted with the appropriate primer.
MAINTENANCE: To be adapted to the applied treatment.
STORAGE: Panels must always be stored flat.
PACKAGING: Individuel dans des cartons. Sauf 2.5mmx10 et 12mm par 2

TECHNICAL CHARACTERISTICS

BRINELL HARDNESS	±43 N/mm² - EN 1534 standard (CTIB Report 5229/2)
CONTRACTION COEFFICIENT	±0.14% per % of moisture variation
MOISTURE CONTENT	±10% at 20°C and 65% relative humidity ±8% at 20°C and 50% relative humidity
DENSITY	±740 kg/m³
FORMALDEHYDE EMISSION ≤ 0.013 mg/m²h - EN 717-1 & EN 16000 standard (CTIB DE670X417)	
THERMAL CONDUCTIVITY	±0.24 W/mK - EN 12664 standard (CTIB Report 5229/2)

WARRANTY: up to 20 years subject to conditions - See our website ootouch.eu

nv ootouch sa
Av du Commerce 33 - 1420 Braine-l'Alleud • Belgium I Tel. : +32 (0)2 384 58 77 I **info@ootouch.be** I **ootouch.eu**