REF: D20CDO140

DeckooTouch by ootouch

THE ECOLOGICAL ALTERNATIVE TO WOODEN DECKING

COMPOSITE RECYCLÉ / **Massif** [Doppio]

DeckooTouch® composite decking is made of 60% wood flour, 30% recycled high-density polyethylene (HDPE) and 10% additives (anti-UV agents, anti-oxidants, binders and hardener, stabiliser, colourant). The doppio features an advanced capping technology providing greater maintenance comfort and optimised resistance to stains and soiling. The quality of our products allows us to offer a warranty of up to 15 years, provided that installation is carried out according to our instructions, in compliance with the country's rules, using our accessories (clips, screws...), and by following our maintenance recommendations.

DOPPIO ESPRESSO



DOPPIO CEYLON





REFERENCE	COLOUR	DIMENSIONS	FACES	PALLET CONTENT	INSTALLATION
D20CDO140	Doppio	20x140x2900	2 (ceylon/espresso)	112 lames 45,47m²	Clips

STORAGE, INSTALLATION AND MAINTENANCE

(according to DTU 51.4 or local standard)

- The boards must be stored horizontally
- A correctly sized substructure (pedestals, joists...) must be installed according to the standards in force.
- Natural ventilation of the structure must be provided (> 1% of the surface).
- As the main component is natural, slight shade variations between batches are possible. Be sure to mix the boards well before installation.
- Our boards, joists and accessories (pedestals, clips, screws) are warranted. We do not warrant the use of other accessories (clips...) or other fixing materials (joists, battens, screws...).
- Locking clips must be used for each board.
- We recommend using our joists.
- Cleaning should be carried out at least once a year.
- Time and the effect of the sun may cause slight shade variations. This phenomenon is natural and cannot be the subject of a warranty claim.
- Low-pressure Kärcher cleaning is possible.
- Installation and maintenance instructions are available on our website www.ootouch.eu

CHARACTERISTICS TECHNICAL

- Brinell hardness: ±79 N/mm² (Intertek 170601007SHF-BP-2)
- Density: ±1340 kg/m³
- Moisture content: 2.6% (28-day immersion at 20°C)
- Fire rating: DFL-S1 EN13893 – TFI 421335-05 – EN13501-1:2010
- Static bending strength: 23.4 N/mm²
- Dimensional stability: max width: 0.3% (28-day immersion at 20°C) max length: 0.2% (28-day immersion at 20°C) max thickness: 2% (28-day immersion at 20°C)
- Slip resistance:

- class DS. Friction coefficient: 0.31 lengthwise and 0.40 widthwise (EN13893:2002, TFI 421335-07)
- Pendulum test: PTV «dry»: 74, PTV «wet»: 41 (BS-7976-2:2002)

- Warranty: 15 years subject to conditions (see our website)


ACCESSOIRES DE POSE

Starter clip	Fixing clip	Locking clip	End clip	Self-tapping stainless torx screw self-drilling	Stainless torx screw (pre-drilling)
					
DCLIPST	DCLIPC	DCLIPBLOC	DCLIPEND	DVPF4.35	DVPF4.25
20 clips/box Stainless 304	100 clips/box Stainless 304	50 clips/box Stainless 304	20 clips/box Stainless 304	4x35mm 200 screws/box Stainless 410	4x25mm 100 screws/box Stainless 410

ACCESSOIRES DE FINITION

Pour une finition impeccable de votre terrasse, nous proposons une gamme de profils de finition adaptés.

 Ceylon


 Espresso

REFERENCE	COLOUR	DIMENSIONS	FACES	PALLET CONTENT
D10CDOC120	Ceylon	10x120x2900	smooth	72 lames
D10CDOE120	Espresso	10x120x2900	smooth	72 lames

THE JOISTS

Bamboo appeals through its natural nobility and exceptional durability. Composite combines technical precision, modernity and rot-proofing.

CHARACTERISTICS	DECKOOTOUCH NATUREL	DECKOOTOUCH COMPOSITE
DIMENSIONS	40 x 40 x 2200 mm	30 x 40 x 2200 mm
MATERIAL	Densified bamboo	Recycled composite
USE	Decking, exposed structures	Decking, cladding, wet areas
STRENGTH	Very high	High and constant
STABILITY	Very low deformation	No warping
HUMIDITY	Class 4	Fully rot-proof
DIRECT GROUND INSTALLATION	Ventilated support required	yes
TYPICAL SPACING	40-50 cm	33 cm
MAINTENANCE	No treatment required	No maintenance
KEY ASSET	Performance + Aesthetics	Durability + Price

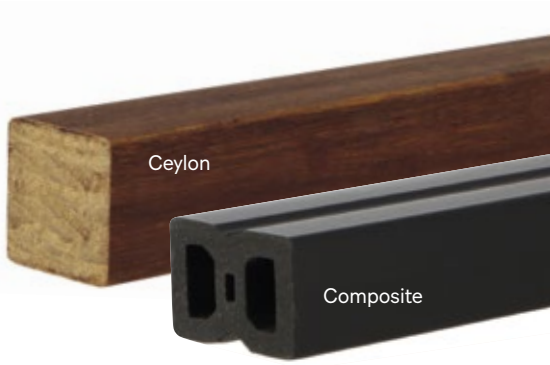

THE ADJUSTABLE PEDESTALS

Plot R1	Plot R2	Plot R3	Plot R4	Extensions	
				30mm	30 - 140mm
					
Réf:DPLR1.3055	DPLR2.5590	DPLR3.90160	DPLR4.160230	DPL.RAL30	DPL.RAL30.140
30-55mm 145gr 60p/sac (8,7kg)	50-90mm 200gr 45p/sac (9kg)	90-160mm 310gr 30p/sac (9,3kg)	165-230mm 390gr 25p/sac (9,7kg)		

Materials: recycled polypropylene – Load capacity: 1.6 to 4.5 Tonnes/m² (depending on the number of pedestals per m²) – Withstands temperatures from -25 to +70°C

ootouch®
DES SOLUTIONS DÉCO-RESPONSABLES

WARRANTY: up to 15 years subject to conditions - See our website ootouch.eu

nv ootouch sa
Av du Commerce 33 - 1420 Braine-l'Alleud • Belgium | Tel. : +32 (0)2 384 58 77 | **info@ootouch.be** | **ootouch.eu**