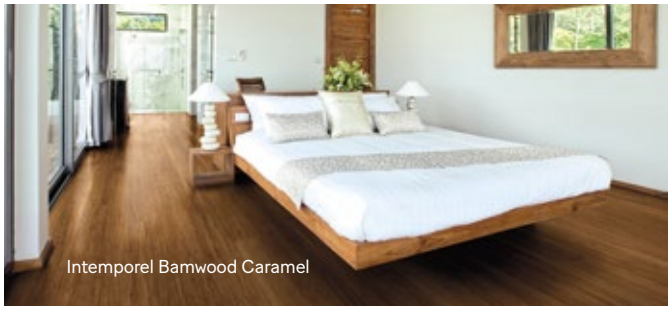
REF: F7SVCC128 / F7SBCC130 / F7SBCCA130
F7SBCCH130 / F7SBCG130

EcooTouch
by ootouch

FLOORING WITH A NATURAL LAYER

Our EcooTouch collection floor coverings consist of a 1 mm layer of solid bamboo laid on a 6 mm SPC core with an integrated IXPE underlay, ensuring great stability. Highly resistant to ambient humidity, EcooTouch is perfectly suited to all environments, including wet rooms and underfloor heating. Quick and easy to install, it is the solution for renovation thanks to its low thickness and attractive price, combined with a 15-year warranty*.


Intemporel Bamwood Caramel



Intemporel Bamwood Champagne

AVAILABLE COLOURS


Intemporel Bamwood Champagne


Intemporel Bamwood Gold


Intemporel Bamwood Camel


Intemporel Bamwood Caramel


Classic Vertical Caramel

REFERENCE	SURFACE	COLOUR	GLUED	FLOATING	UNDERFLOOR HEATING	POSE SDB[2]	DIMENSIONS	WEAR LAYER	UNDERLAY	STRUCTU	BEVEL	INTERLOCKIN	BOX
F7SVCC128	Classic Vertical	Caramel	•	•	•	•	6/1x128x960	+/- 1mm	IXPE	SPC	Mini	Click	1,47m² 17,5Kg
F7SBCC130	Intemporel	Caramel	•	•	•	•	6/1x130x920						1,43m² 18Kg
F7SBCCA130	Intemporel	Camel	•	•	•	•							
F7SBCCH130	Intemporel	Cham-pagne	•	•	•	•							
F7SBCG130	Intemporel	Gold	•	•	•	•							

1 Installation of the BSPC over underfloor heating is possible as a floating installation, but heating efficiency will be affected.

2 When installing in a wet room, the perimeter sealing must be carried out very carefully. Consult your specialist. Installation advice available on our website www.ootouch.be

STORAGE, INSTALLATION REQUIREMENTS AND MAINTENANCE

(DTU 51.2 standard or local standard, depending on installation type)

- The boards must be stored horizontally at a temperature of 15 to 25° and a relative humidity of 45 to 65%.
- The floor requires acclimatization and must be left for 48h in its packaging at the installation site.
- Bamboo is a natural product. Variations in colour and/or grain are normal. Be sure to mix the boards from the different packs before installation. Any installed floor will be considered accepted.
- The screed must be dry, clean and even. Comply with the standards in force regarding moisture content, evenness and permissible load. Residual moisture must not exceed 2.7%.
- Allow an expansion gap of +/- 7mm all around the floor and obstacles.
- Provide an expansion joint every 8 to 10m.
- Installation, cleaning and maintenance instructions are available on our website. www.ootouch.be/fr/conseils

TECHNICAL CHARACTERISTICS

- Brinell hardness: Bamwood: ± 9 kg/mm² Vertical: ± 4.5 kg/mm²
- Contraction / expansion: < 0.1%
- Deformation: ≤ 0.5mm (at 80°C for 6h)
- Density: ± 1,500 kg/m³
- Sound insulation: Δ -18 dB
- Fire rating: Cfl-s1
- Formaldehyde emissions: E1/A+ <0.003mg/m²h (EN 16000-9)
- TVOC: E1/A+ 0.039mg/m²h (EN 16000-9)
- Warranty: up to 15 years subject to conditions (see our website)



* provided that installation is carried out according to our instructions, in compliance with the standards in force in the country and following our maintenance recommendations.

ACCESSORIES INTEMPOREL BAMWOOD®

		Caramel	Camel	Gold	Champagne	Dimensions Dimensions
Skirting / nose step		AWB14BCC88				14 x 88 x 1860 mm
			AWB14BCCA70	AWB14BCG70	AWB14BCCH70	14 x 70 x 1860 mm
Low skirting		AW14BCC50				14 x 50 x 1860 mm
Quarter round		AQR15BCC15				15 x 15 x 1860 mm
T-profile round		ATM15BCC50		ATM15BCG50		15 x 50 x 1860 mm

ACCESSORIES VERTICAL

		Caramel	Dimensions Dimensions
High skirting / stair nose		AWB15VCC88	15 x 88 x 1860 mm
Low skirting		AWB15VCC50	14 x 50 x 1860 mm
Quarter round		AQR15VCC15	15 x 15 x 1860 mm
T-profile round		ATM15VCC50	15 x 50 x 1860 mm

ootouch®
DES SOLUTIONS DÉCO-RESPONSABLES

WARRANTY: up to 15 years subject to conditions - See our website ootouch.be

nv ootouch sa
Av du Commerce 33 - 1420 Braine-l'Alleud • Belgium | Tel. : +32 (0)2 384 58 77 | **info@ootouch.be** | **ootouch.be**